

GV-IP Decoder Box Ultra



TV-Out Solution for IP cameras (ONVIF, RTSP)

Introduction

GV-IP Decoder Box Ultra is designed to decode incoming IP streams from GeoVision and third-party IP devices. It serves as a medium for connecting the cameras and the monitor for video display in Single, 4-Division, 8-Division, and 9-Division View. It supports third-party IP cameras that adhere to RTSP or ONVIF and is able to automatically search for ONVIF-compliant third-party IP devices under the same LAN. To be used with only a monitor, GV-IP Decoder Box Ultra provides a cost-effective solution for video surveillance as opposed to the traditional DVR and PC setup. The security administrator can monitor channels, take snapshots of critical moments, and pause at a channel when events occur. GV-Joystick V2 can be installed to control GeoVision and third-party PT / PTZ / Speed Dome cameras.



Features

- Decode video streams in H. 264 / H.265 codec up to 30 fps
- Decode up to 8-megapixel IP cameras
- Decode up to 64 IP streams
- Automatically search for ONVIF IP devices
- Support for third-party IP cameras that adhere to RTSP or ONVIF
- Support for Single, 4-Division, 8-Division, and 9-Division View
- Display of Matrix view through GV-Mobile Server
- Support for 10/100 Ethernet over LAN
- DC 12V / PoE (IEEE 802.3af)
- HDMI video output resolutions up to 4K
- Control the user interface using GV-IR Remote Control
- Control PTZ and Speed Dome cameras using GV-Joystick V2
- Remote firmware upgrade, IP address configuration, and addition of new channel
- Micro SD card and USB drive for snapshot storage and firmware upgrade

*** No SD/SDHC card slot & local storage function for Argentina.**

Compatible Devices

GV-IP Decoder Box Ultra is compatible with:

1. GV-IP Camera and GV-Video Server using H.264 / H.265 codec
2. Third-party IP devices supporting H.264 / H.265 and adhering to RTSP or ONVIF
3. GV-Mobile Server

To decode and display **non-H.264 / H.265** IP channels, **analog** channels or **GV-FER12203 / 12700**, connect the devices to GV-DVR / NVR and access them through GV-Mobile Server.


Specifications

Video		
Video Codec	H.264, H.265	
Audio Codec	G.711	
Maximum Resolution	1-ch Division	3840 x 2160
	4-ch Division (Quad View)	Grid 1: 2560 x 1920; Other 3 grids: 1920 x 1080
	8-ch Division	1280 x 720 for each grid
	9-ch Division	1280 x 720 for each grid
Video Output at 60 Hz	HDMI	720p / 1080p / 4K
Network		
Interface	10/100 Ethernet	
Protocol	ONVIF, RTSP, TCP	
Mechanical		
Connectors	Power Adapter	12V DC Jack
	Ethernet	RJ-45
	Monitor Output	HDMI
	Memory Card	Micro SD/SDHC card slot (for Class 4 or above, FAT32 and NTFS formats)
	USB 3.0	USB slot (3.0 backward compatible, FAT32 and NTFS formats)
	USB 2.0	USB slot x 2 (2.0 backward compatible, FAT32 format)
General		
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)	
Operating Humidity	20% ~ 80% (with no condensation)	
Weather Resistance	Indoor use only	
Dimensions (W x H x D)	152 x 34 x 102 mm (6" x 1.35" x 4.04")	
Net Weight	500 g (1.10 lb)	
Power	DC 12V / PoE (IEEE 802.3af)	

Power Consumption	36 W (max. 3A at 12V DC)
Regulatory	CE, FCC, LVD, RCM compliant
Language	English, French, German, Italian, Japanese, Polish, Portuguese, Russian, Spanish, Traditional Chinese

Note: Specifications are subject to change without notice.

Dimensions

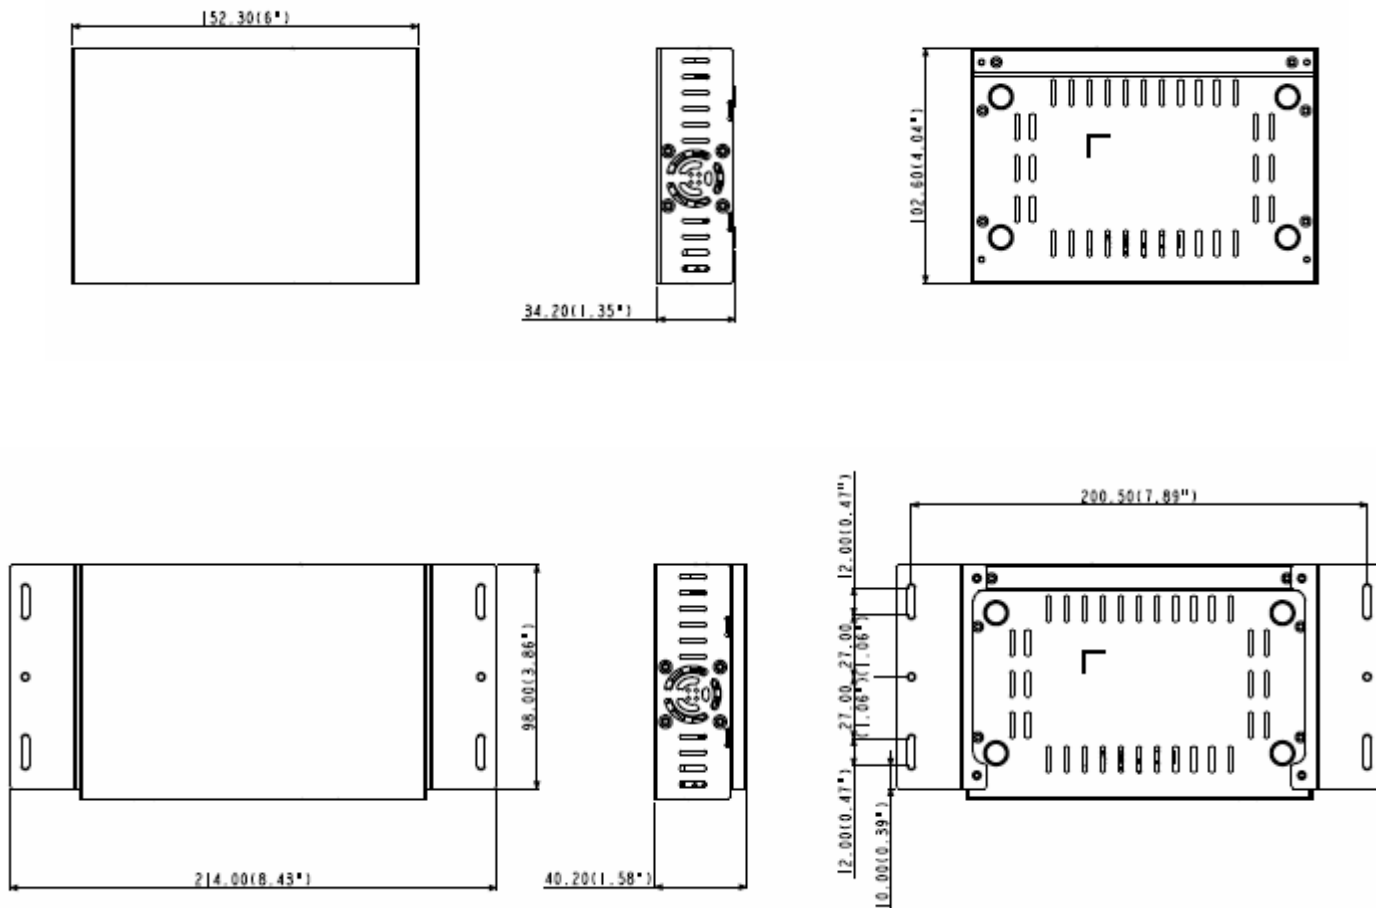

Overview




Front View



Rear View



Accessories

Name	Details
GV-Joystick V2 	GV-Joystick V2 facilitates focusing, zooming, panning, tilting of GeoVision and third-party PT, PTZ and Speed Dome cameras on GV-IP Decoder Box Ultra.
GV-POE Switch	The GV-POE Switch is designed to provide power along with network connection for IP devices. The GV-POE Switch is available in various models with different numbers and types of ports.
HDMI Cable 	Use the HDMI cable to connect GV-IP Decoder Box Ultra with a HDMI monitor for high-quality display of images. Length: 150 cm (4.92 ft) Version: 1.4a
Power Adapter	Contact our sales representatives for the countries and areas supported.
Wall Mount Kit 	Use the Wall Mount Kit to install your GV-IP Decoder Box Ultra on wall.

Packing List

- GV-IP Decoder Box Ultra
- GV-IR Remote Control
- Download Guide
- Warranty Card