Product data sheet

ATS1500A-KIT-6-NG

Kit ATS1500A-MM including TDA7400NG 3G communication module

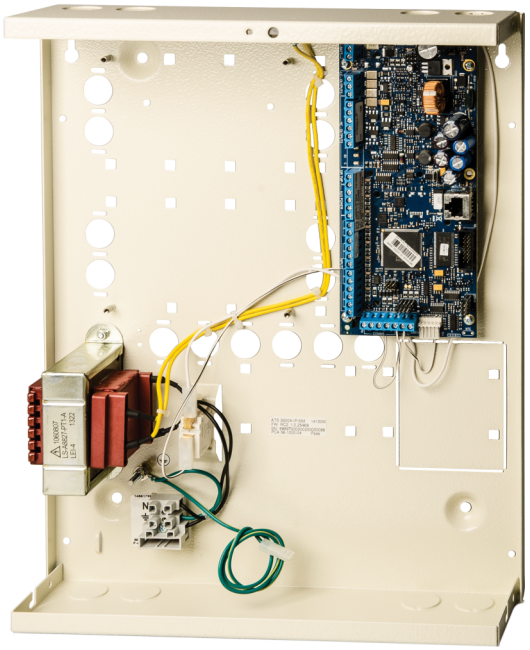

Details

- 8 onboard zone inputs
- Max 32 zones: wired, wireless or mixed
- Economic input and output plug-in expansion
- Up to 16 shock sensor inputs
- 4 areas
- Up to 2000 users without access controller and up to 65532 with access controller
- EN50131 Grade 3 (when ATS-MM-TK added) / Environmental class 2
- USB port for local configuration
- ATS7700 Plug-on PSTN dialler for reporting or configuration included
- Multilingual - own language for each user
- IP alarm reporting with optional TDA74x range IP / GPRS module
- Remote U/D over PSTN or optional IP / GPRS module
- Standard access control without additional door controllers
- Full access control using ATS125x or CDC4 door controllers
- Auto Arming - Schedules - Times Outputs

ATS1500A-KIT-6-NG

Kit ATS1500A-MM including TDA7400NG 3G communication module

Technical specifications

System

Product type	Integrated Access Control
Panel type	Hybrid
No. of keypads / readers	16
Data Gathering Panels (DGP)	15
No. of alarm groups	16
Specified cable	WCAT52 WCAT54 or equivalent

Inputs

Max no. of inputs	32
Onboard inputs	8
Inputs plug-in expansion	8

Outputs

No. of outputs	128
No. of onboard outputs	5

Area

No. of areas	4

User/Cards

Max. no. of users	more than 1000
Max. no. of cards	2000 - 65532
Max. no. of PIN codes	2000 - 65532

Access control

Standard doors on control panel	4
Door groups	128
Intelligent doors on 4-door DGPs	28

Communication

Onboard transmission type	PSTN
Transmission extension	GSM/GPRS/IP
Databus type	RS485

Event log

Alarm event log	250-1000
Access event log	10000

Electrical

Power supply type	230 VAC
Power supply value	230 VAC +10%, -15%, 50 Hz
Mainboard current consumption	150 mA
Max system current	950 mA at 13.8 V ±0.2 V
Max aux power current	840 mA
Auto-reset fuses	5
Glass break fuses	1

Physical

Physical dimensions	315 × 388 × 85 mm
Housing	Medium Metal

Environmental

Operating temperature	-10 to +55°C
Relative humidity	95% noncondensing
Environmental Class	Class II, indoor
IP rating	30

Standards & regulation

EN50131 Grade	Grade 3
Compliancy	CE

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

Last updated on 23 June 2020 - 8:14