


**CODE:** AWO515 v1.6/III  
**NAME:** 17/TRZ50/M-F/SATEL

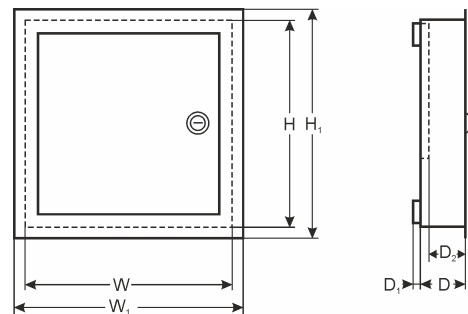

## DESTINATION

**DSC:** 1) PC1616, 1832, 1864, 4020+ 3x 5108( 4108, 5208, 5100, 4116)

**MODULES:** 1) PC5204, 5400, 5200, 5580, 4216, 4204+ 3x 5108 ( 4108, 5208, 5100, 4116)

**PARADOX:** E55, 65, 728ULT, SP4000, 5500, 6000, 7000, EVO48, 192 + ZX8 ( ZX4, APR3- ADM2, APR3- HUB2, PGM4)

**RISCO:** 1) PRO24, 116, 128, 140+ RP296EPS

**SATEL:** 1) CA4V1, 5,6,10, VERSA 5,10,15, INTEGRA 24, 32+ 2xCA64E ( CA10E, SM, MST1)  
 2) INTEGRA 64/128 + CA64E(CA10E, SM, MST1)

**MODULES:** CA64 ( PP, EPS, ADR, O-R, O-ROC, O-OC, OPS-OC, OPS-R, OPS-ROC, VGM16, SR, PTSA)+ 2x CA64E ( CA10E, SM, MST1)

**PYRONIX:** 1) MATRIX 424, 6,816, 832, 832+

**TEXECOM:** PREMIER 412, 816, 832, 48, 88, 168, 640

**TELMOR:** 1) TCA824+ TEX800

**ROGER:** 1) PR402, CPR 32-SE

**EBS:** 1) PX202A

**PULSAR:** 1) MS1012, MSR1012, MSRK1012  
 2) MS2012, MSR2012, MSRK2012

## TECHNICAL DATA

<b>External dimensions of the enclosure:</b>	W=350, H=400, D+D <sub>i</sub> =100+8 [+/- 2mm]
<b>External dimensions of the flange:</b>	W <sub>i</sub> =385, H <sub>i</sub> =430 [+/- 2mm]
<b>Working depth:</b>	D <sub>2</sub> =80 [+/-2 mm]
<b>Weight net/gross:</b>	5,75kg / 6,20kg [+/-0,1kg]
<b>Battery space:</b>	17Ah/12V Sealed Lead Acid (SLA)
<b>Transformer:</b>	TRZ 50VA16V/18V/20V in the case of PC/ABS in class UL94-V0, IP43
<b>Power supply:</b>	230V/AC (-15%/+10%), 50Hz, 250mA (max.)
<b>Power supply output:</b>	U1=16V or U2=18V or U3=20V/AC (-5%, +15%), I1=3,0A or I2=2,8A or I3=2,5A (max.)
<b>Operating environment:</b>	class II, -10°C÷ 40°C
<b>Material description:</b>	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
<b>Destination:</b>	indoor
<b>Tamper protection:</b>	1 x microswitch: opening, 0,5A@50V/DC max. NC
<b>Closing:</b>	lockable (MR 008 - different code)
<b>Notes:</b>	flush type casing, removable back mounting plate and front frame, easy door removal, additional side mounting plate(s), for Satel's control panels only, distance from wall - 8mm
<b>Declaration, warranty:</b>	CE, 2 year from the production date