

DS-D5032FL 32" LCD Monitor




Key Features

- Backlit LED, Full HD 1920 × 1080 Resolution
- Wide Viewing Angle: 178° H/178° V
- 3D Comb Filter, 3D De-Interlace, 3D Noise Reduction, Skin Tone Correction
- HDMI, VGA, BNC, and USB Inputs
- Audio Input; Built-In Speakers
- Image Freeze
- High Reliability, Designed for 24 x 7 Use
- Metal Bezel for High Durability
- VESA Mount (200 mm x 200 mm)

DS-D5032FL	
Display	
Display Type	LED backlit TFT LCD
Screen Size	32"
Pixel Pitch (H × V)	0.807 mm × 0.807 mm
Maximum Resolution	1920 × 1080
Brightness	400 cd/m ² (typical)
Contrast	4000:1
Response Time	8 ms
Color	16.7 M
Viewing Angle	Horizontal 178°, vertical 178°
Inputs	
HDMI	HDMI × 1
VGA	VGA × 1
DVI	DVI × 1
BNC	BNC × 1
USB	USB × 1
Audio	
Audio Input	1, 3.5 mm mini-jack
Audio Out	1, 3.5 mm mini-jack
Speaker	3 W × 2
Mounting	
VESA	200 mm × 200 mm
General	
Ratings	FCC, CE
Bezel	Metal
Power Supply	100 to 220 VAC, 50/60 Hz
Consumption	<75 W (on) <1 W (standby)
Operation Temperature	0° C to 40° C
Operating Humidity	10% to 85% (non-condensing)
Storage Temperature	-20° C to 55° C
Storage Humidity	5% to 95% (non-condensing)
Dimension (W × H × D)	737.4 mm × 452.5 mm × 70.65 mm (29.03" × 17.81" × 2.78")
Weight	19 kg (gross)/41.89 lbs

Dimensions

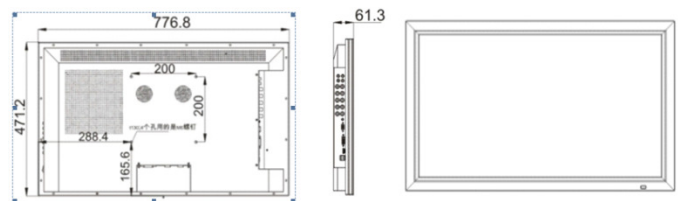

Accessories

Table Mount: Part No. 190109088

Wall Mount: Part No. 190112360

Order Model

DS-D5032FL