

Specification

DS-PWA32-NST

868MHz Wireless control Panel Kits with IC Cards (3G/4G Version)

Including :

DS-PWA32-HSR * 1


DS-PD2-P10P-W * 1

DS-PD1-MC-WWS * 1

DS-PTS-MF * 5



Typical Application

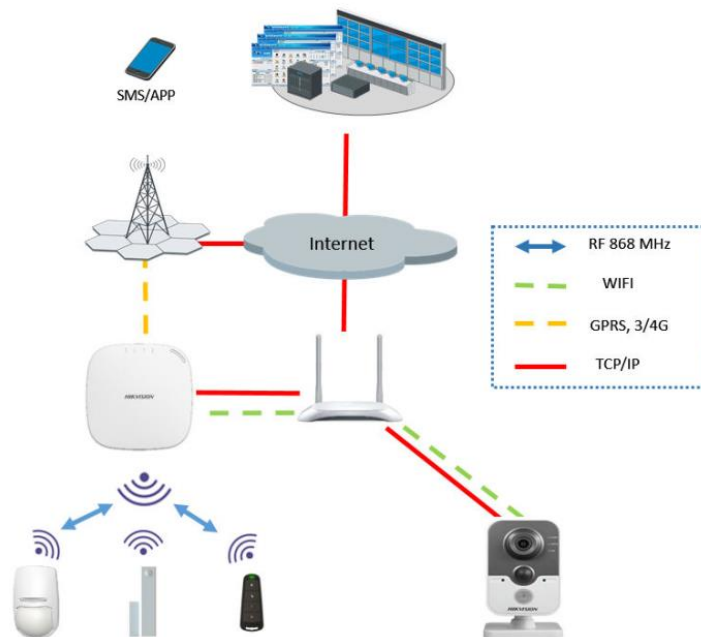

DS-PW32-H(R)(S)(G)		
Wireless Device Connection	Alarm Input	32
	Alarm Output	32
	Siren	2
	Keyfob	8
	Partition	1
Interaction	Audio Output	1, 1.5W
RF	RF Frequency	868MHz
	RF Modulation	2GFSK
	RF Distance	800m (Open Area)
Wired Network	Ethernet	10M/100M Self-adaptive
Cellular Network	GPRS, 3/4G	Supports reporting push-notification to ARC & Cloud, text notification via SMS, and audio notification via phone call
Wi-Fi	Standard	802.11b/g/n
	Encryption	Supported
	Channel	2.4 G
Application & Protocol	Application	iVMS-4200, and mobile APP
	Protocol	SIA - Contact ID
User	IC Card	12
	User	13 (1 installer, 1 administrator, and 11 general user)
Others	Power	5 VDC, 10 W
	Consumption (without HDD)	< 5.6 W
	Operation Temperature	-10 °C to 55 °C
	Operation Humidity	10% to 90%
	Shell Material	PC+ABS
	Dimension(WxHxD)	155 × 155 × 35mm