


# EST-xAudi-8

## 8 audio input card for function slot

### Overview

---

This audio input extension card is destined for a function slot of EST-CU-8LCD. It offers 8 symmetrical line audio inputs via an RJ45 connector.

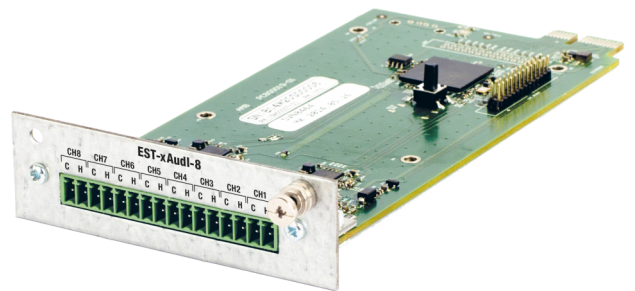

# EST-xAudI-8

## 8 audio input card for function slot

### Technical specifications

---

#### Eléctrico

---

Consumo de corriente 25 mA at 48 V

---

#### Entrada

---

Cantidad y tipo 8, Differential

---

#### Físico

---

Dimensiones físicas 70 x 160 x 25 mm (W x H x D)

---

#### Medioambiental

---

Temperatura de funcionamiento 0°C to +60°C

---

Temperatura de almacenamiento -20°C to +70°C

---

#### Estándares y regulaciones

---

Normativas EN54-16

---

#### Electrical

---

Source of power EST-CU-8LCD Control Unit main backplane

---

#### Environmental

---

Operating humidity 15% to 80% non-condensing

---

Storage humidity 5% to 95% non-condensing

---

#### Input

---

Type of connector and number of audio inputs Screw terminals PHOENIX

---

16 pin -type, 3,5 mm

---

Input impedance  $\geq 10 \text{ k}\Omega$

---

Input voltage 3 Vrms max.

---

