


EST-XLOGIN-8F

8 logical inputs card (function slot)

Overview

The logical input card for a function or control slot has 8 control inputs which may receive signals from other systems in order to trigger a desired reaction of EST ENT VES system. Inputs of an EST-xLogIN-8c/f card offer two modes of operation: contact mode (short / open contact) and monitor mode in which in addition to contact mode function, short circuit and opening of the cables connected to the card are detected.

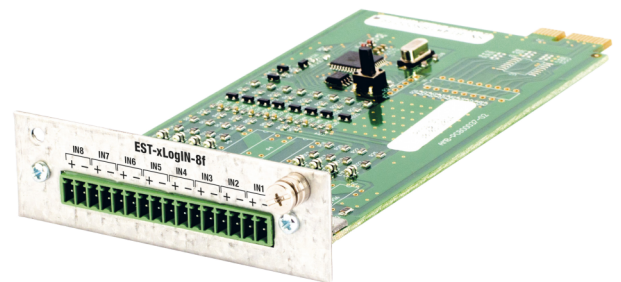

EST-XLOGIN-8F

8 logical inputs card (function slot)

Technical specifications

Eléctrico

Voltaje de funcionamiento	12 V
Consumo de corriente	10 mA at 48 V

Físico

Dimensiones físicas	70 x 160 x 25 mm (W x H x D)
---------------------	------------------------------

Medioambiental

Temperatura de funcionamiento	0°C to +60°C
Temperatura de almacenamiento	-20°C to +70°C

Estándares y regulaciones

Normativas	EN54-16
------------	---------

Electrical

Power supply	Internal from the Control Unit
--------------	--------------------------------

Input

Number of logic inputs	8
Voltage source	12 V
Type of control logic	NO / NC
The resistance value interpreted as the opening of the line	RL>20k
The resistance value interpreted as a contact close	RL<5k
The resistance value interpreted as a contact open	RK>10k

Environmental

Operating humidity	15% to 80% non-condensing
Storage humidity	5% to 95% non-condensing

Physical

Type of connector	16-pin screw terminal type PHOENIX, 3.5 mm
Accessories	Connector with screw terminals 16 pins, the distance between the partitions of 3.5 mm

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

Last updated on 3 July 2020 - 15:29

