
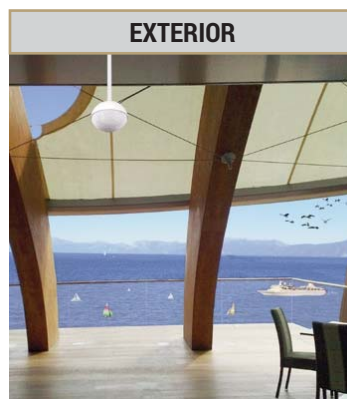


## ALTAVOZ COLGANTE CON DISPERSIÓN DE 360°

**SAT360W / SAT360B** 1x5" + 4x0,5" 50 W 106 dB

Esfera colgante con dispersión de 360° H x 180° V para techos altos, de 50 W de potencia en línea de 100 V y disponible la conexión a 8 ohm y 65 W. Compuesta por 5 altavoces (1 x 5" y 4 x 0,5"). Para interior y exterior (grado de protección IP34). Disponible en color blanco (SAT360W) y negro (SAT360B).

Altavoces	woofer 5" + 4 x tweeter 0,5"
Potencia RMS	50 W, 100 V
Selección de potencia	50, 25, 12, 6 y 3 W (conmutador)
Baja impedancia	8 ohm (65 W)
Respuesta en frecuencia	115 ~ 12.000 Hz
SPL 1 m, 1 kHz	89 dB (1 W) / 106 dB (50 W) / 107 dB (65 W)
Filtro de cruce	5 kHz, 6 dB
Dispersión	360°H x 180° V
Dimensiones (mm)	229 (Ø) x 203
Acabado	Recinto de polietileno y rejilla metálica
Color	Blanco (SAT360W) o negro (SAT360B)
Peso	2,48 kg (unidad), 3,64 kg (total)

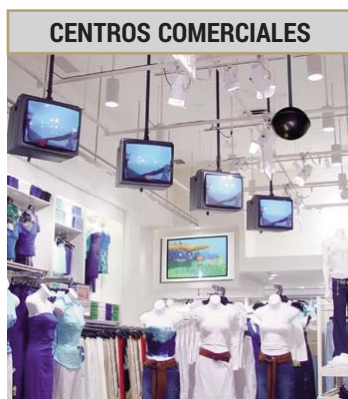

## PENDANT SPEAKER WITH 360° DISPERSION

**SAT360W / SAT360B** 1x5" + 4x0,5" 50 W 106 dB

Pendant sphere with 360° H x 180° V dispersion for high ceilings, with 50 W RMS power in 100 V line and with 8 ohm connection available (65 W). Composed of 5 speakers (1x5" and 4x0.5"). For indoors and outdoors (protection grade IP34). Available in white (SAT360W) or black (SAT360B) colour.

Speakers	woofer 5" + 4 x tweeter 0,5"
RMS Power	50 W, 100 V
Power selection	50, 25, 12, 6 y 3 W (selectable switch)
Low impedance	8 ohm (65 W)
Frequency response	115 ~ 12.000 Hz
SPL 1 m, 1 kHz	89 dB (1 W) / 106 dB (50 W) / 107 dB (65 W)
Crossover	5 kHz, 6 dB
Dispersion	360°H x 180° V
Dimensions (mm)	229 (Ø) x 203
Finished	Enclosure in polyethylene and metallic grill
Color	White (SAT360W) or black (SAT360B)
Weight	2,48 kg (unit), 3,64 kg (total)

